


Insulated Stay

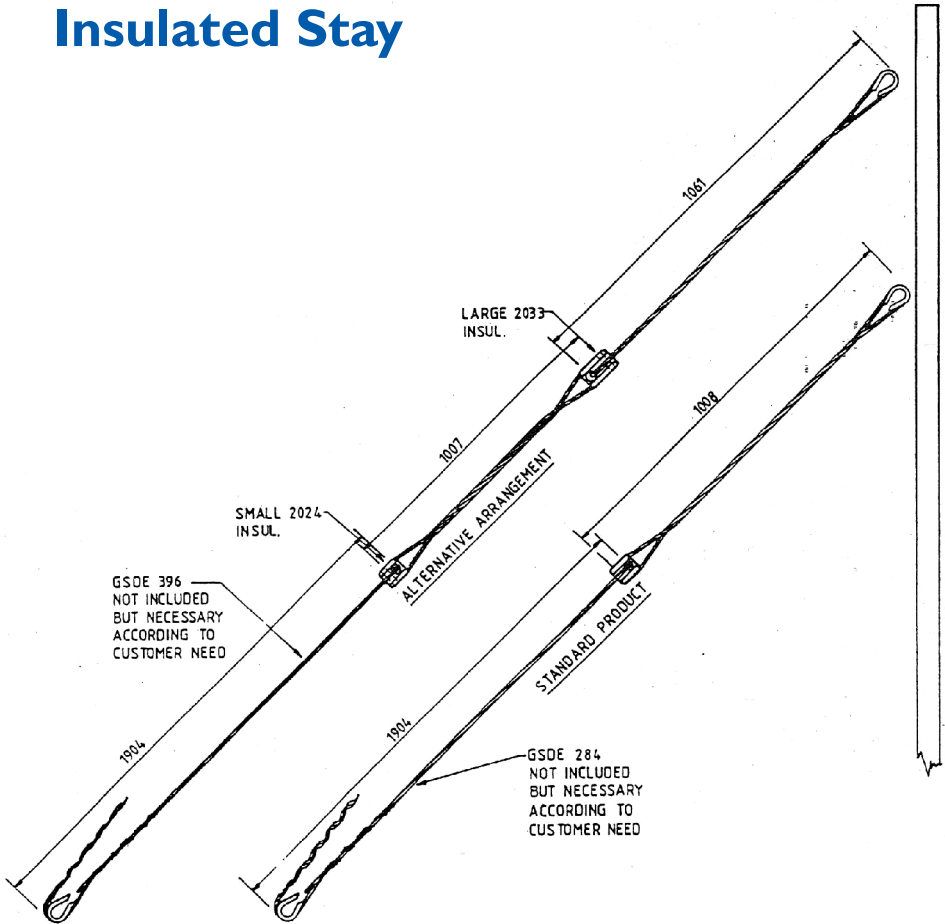

General Recommendations

Designed to serve as a one-piece complete stay fitting from the pole top bracket to the eye of the stayrod where the stay angle is fixed at 45°. This fitting can be customised to suit variable length needs, on request.

INDEX

CAT No. SIL 345/2024 - MFL 34kN, I SMALL INSUL.

D - 78

CAT No. SIL 396/2033 - MFL 54kN, I LARGE INSUL. (STD MV. SIZE)



Copyright 2010 Preformed Line Products • All rights reserved

Telephone: 033 397 5800 • Facsimile: 033 387 7094

Email: plppmb@preformedsa.co.za

Website: www.preformedsa.co.za

Insulated Stay

GUY STRAIN INSULATOR

CATALOGUE No.	2024	2033	2025
WITHSTAND VOLTAGE kV			
DRY	23	31	25
WET	11	16	12,5
FLASHOVER VOLTAGE kV			
DRY	25	35	30
WET	12	18	15
TENSILE STRENGTH kN			
	34	90	54
LEAKAGE DISTANCE mm			
	60	57	48
OVERALL LENGTH mm			
	90	140	108

Note

1. Customer must specify Loop diameter to accommodate particular insulator intended for use.
2. Double insul. assembly also available on request.
3. A GUY-GRIP® is necessary to attach bottom.

N.B.

4. This product has a fixed length which presupposes 45° stay angle. Please refer to PREFORMED™ Line Products in event of any variation.

INDEX

D - 79