


Pulling Eye

The PREFORMED™ Pulling Eye is designed to facilitate safe, fast installation of GUY-GRIP dead-ends at the anchor rod. Constructed of corrosion-resistant nodular iron, this re-usable tool has a large eye which is offset to position the hook of the chain hoist safely to one side, and permit easy, uncrowded application of the dead-end. The PREFORMED™ Pulling Eye is adjustable for rod size, and is engineered to withstand a 1360 kg working load without failure. A red vinyl coating provides weather and handling protection and ready identification.

1. Component Parts. The keeper is to be used with 1/2", 5/8" and 3/4" anchor rods (see arrows). For 1" and 1 1/4" anchor rods, the PREFORMED™ Pulling Eye is used without the keeper.

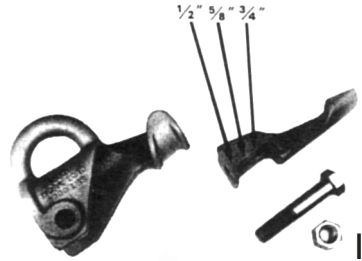

Caution: The Pulling Eye must be secured with the nut and bolt on every installation.

Note: The bolt is made of specially heat-treated extra-high-strength steel, and is identified by the industry mark on its head. Any replacement should be the same quality.

2. PREFORMED™ Pulling Eye in position on 3/4" anchor rod. Note that the keeper (see arrow) is used.
3. PREFORMED™ Pulling Eye in position on 1 1/4" anchor rod. Note that the keeper is not used.



CATALOGUE NO.

DESCRIPTION

STD. CTN.

PE-0300

Pulling Eye

4 Units

NOTE: 1360kg working load is based on a 5 to 1 safety factor.

INDEX

D - 77