


## Vertical Bundling Link for Twin Conductor Suspension

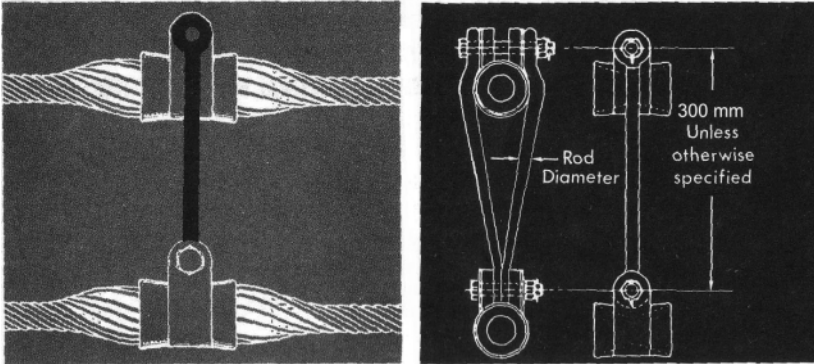

### General Recommendations

PREFORMED™ Vertical Bundling Link is designed for use on construction where ARMOR-GRIP Suspension units are used in a vertical twin conductor configuration, at a given spacing between conductor centres. A H.D. galvanised fastener M16 x 95 (connecting pin) is supplied with the link to replace the standard length AGS fastener. If a longer fastener is required please consult PLP.

**Material:** The Bundling Link is manufactured from aluminium alloy 6082 flat section, and shaped to accommodate the AGS units.

**Safety Considerations:** This product is intended for a single (one-time) use and for the specified application. DO NOT MODIFY OR REUSE THE PRODUCT. This product is intended for use by trained crafts-people only. It should not be used by anyone who is not familiar with and trained in the use of it. When working in the area of energised lines, EXTRA CARE must be taken to prevent accidental electrical contact.

### Ordering Information:

CATALOGUE NO.(mm)	COND O.D.(mm)	DIMENSIONS (mm)		
		COND. SPACING	OVERALL LENGTH	VERTICAL STRENGTH
VL-AGS - 150	16.4 to 19.0	150	260	70 kN
VL-AGS - 225	34.4 to 38.6	225	390	120 kN

INDEX

D - 4

