


FIBERLIGN[®] Non-insulated Helical Attachment Downlead Clamp for OPGW

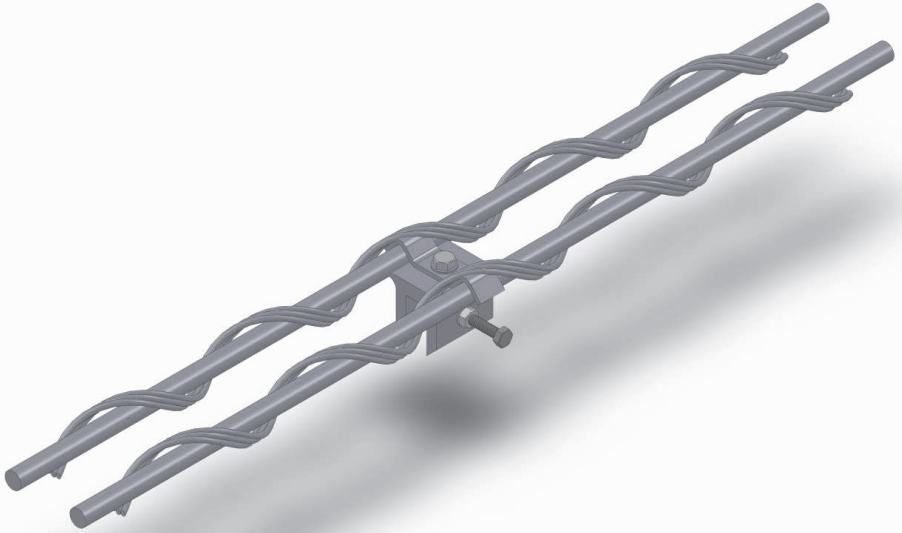

Be sure to read and completely understand this procedure before applying product.
Be sure to select the proper PREFORMED[™] product before application.

1. Nomenclature

1.2 DCPB Type – Cat No. suffix in accordance with cable O.D.

| CATALOGUE NO | DIAMETER RANGE mm | |
|-----------------|-------------------|-------|
| | MIN. | MAX. |
| DCPB 716/787 | 18.2 | 20.00 |
| DCPB 899/915 | 22.83 | 23.24 |
| DCPB 930/967 | 23.62 | 24.56 |

INDEX

F - 22