


FIBERLIGN® Non-insulated Downlead Clamp for OPGW

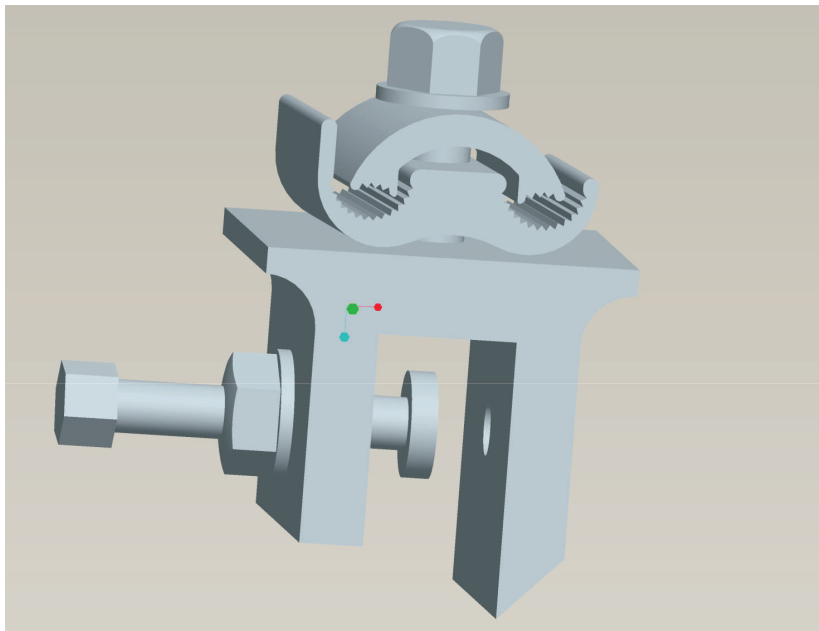

Be sure to read and completely understand this procedure before applying product.
Be sure to select the proper PREFORMED™ product before application.

1. Nomenclature

1.2 PG Type – Cat No. suffix in accordance with cable O.D.

CATALOGUE NO	DIAMETER RANGE mm	
	MIN.	MAX.
DCPG 1556-1B	3.71	14.35
DCPG 2674-1B	6.6	18.8