


EUT

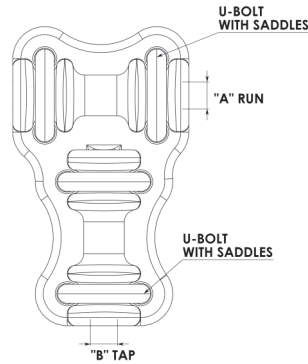

These clamps are of the bolted type clamp suitable for making “Tee” connections off a busbar or line conductor. The “RUN” as well as the “TAP” is fitted with two independent bolted saddles.

EUT – Type Clamps should only be used in very low or non-current carrying applications.

NEW TYPE DESIGNATION	OLD TYPE DESIGNATION	DIAMETER		RATED CURRENT [A rms]	MAXIMUM VOLTAGE (Um) [KV rms]
		A	B		
EUT – A	UT – 1	6 – 11	6 – 11	250	145
EUT – B	UT – 2	12 – 21	12 – 21	500	145
EUT – C	UT – 3	12 – 21	22 – 28	500	145
EUT – D	UT – 4	22 – 28	12 – 21	500	145
EUT – E	UT – 5	22 – 28	22 – 28	600	145
EUT – F	UT – 6	12 – 21	6 – 11	250	145

- All clamps supplied with M12 Galvanised Bolts, nuts & washers
- Recommended Torque (Nm): 45 Nm

INDEX

S - 4

