


## EYBC

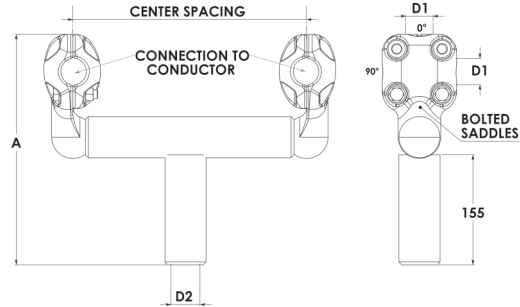

These clamps are designed to equalize the phase conductor bundle drop off points from the busbars where phase dropper conductor bundles of fewer conductors per bundle are used. They keep standard conductors at specified distances apart and are designed to withstand the forces that occur under short circuit conditions.

NEW TYPE DESIGNATION	OLD TYPE DESIGNATION	CONDUCTOR SIZE "D1" (mm)	CENTRE SPACING (mm)	CONDUCTOR SIZE "D2" (mm)	RATED CURRENT [In] (A rms)	MAXIMUM VOLTAGE [Um] (KV rms)
EYBC – A	YBC26/26/15	2 X 26.5	150	26.5	900	300
EYBC – B	YBC26/28/33	2 X 26.5	330	38.3	1350	420
EYBC – C	YBC38/26/15	2 X 38.3	150	26.5	900	300
EYBC – D	YBC38/38/15	2 X 38.3	150	38.3	1350	420
EYBC – E	YBC38/38/33	2 X 38.3	330	38.3	1350	420

- All clamps supplied with M12 Galvanised Bolts, nuts & washers
- Recommended Torque (Nm): 45 Nm