


## Dead-ends for telephone dropwire

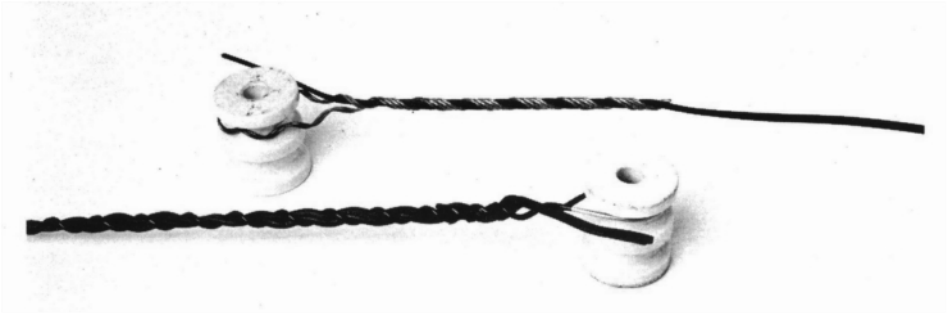

PREFORMED™ Drop Wire Dead-ends provide an easy, low-cost way to support service drop wire without bail failures or stripping the insulation. Rapidly applied by hand without tools, they exert firm uniform holding power throughout their length, without crushing or damaging drop wire. Wrap-on design prevents potentially damaging stress points and corrosion pockets. PREFORMED™ Drop Wire Dead-ends present a trim, neat appearance, and are manufactured of PVC-coated stainless steel for added protection against the elements, or of bare cadmium copper and gritted.

The loop can be designed to accommodate particular insulator grooves or terminating hooks.

STAINLESS STEEL PVC-COATED DEAD-END FOR USE ON EPDM-INSULATED DROPTWIRE, HAVING NOMINAL DIMENSION 3,9 mm x 7,8 mm

**Catalogue No.:** DWE I66SS

CADMIUM COPPER GRITTED DEAD-END FOR USE ON XLPE-INSULATED DROPTWIRE WITH NOMINAL DIMENSIONS 2,5 mm x 5,0 mm

**Catalogue No.:** DWE I35C

**INDEX**

**TC - 18**



Copyright 2010 Preformed Line Products • All rights reserved  
Telephone: 033 397 5800 • Facsimile: 033 387 7094  
Email: [plppmb@preformedsa.co.za](mailto:plppmb@preformedsa.co.za)  
Website: [www.preformedsa.co.za](http://www.preformedsa.co.za)