


GUY-GRIP®

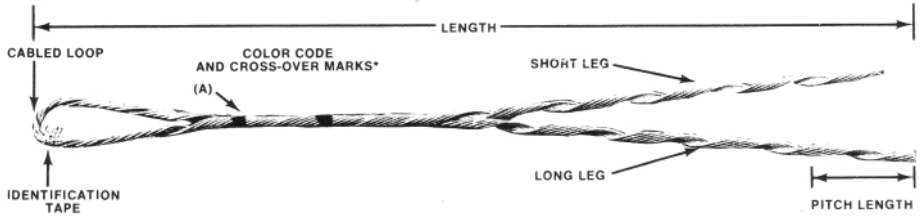

GUY-GRIP® installed at the top, the breaker and the anchor, provide today's most modern method of securing guy strand. They are neat in appearance, free from bolts or high-stress holding devices. A one-piece terminating fitting. This unique product can be applied in seconds without the use of tools.

The assembly is complete and permanent, assures positive grip under the most extreme conditions. GUY-GRIP® are made of the same material as the strand to which they are applied and meet the published rated breaking strength of the strand.

PERFORMED™ GUY-GRIP® was the first to offer the *cabled loop*, a feature providing more durability, easier tensioning and adaptability to multiple guying.

Cross-over Marks: Indicates starting point for application on smaller diameter fittings described on the reverse side of this page.

Cable Loop: Furnished as standard, all sizes.

Pitch Length: One complete wrap.

Short Leg-Long Leg: Identifies rods belonging to each leg, after application.

Colour Code and Length: Assist in identification of strand size.

Identification Tape: Shows catalogue number, nominal sizes.

INDEX

TC - I